

Standard Cannulated Screws

D	L	Thread	
Φ2.4	10-30	Short	4-8
Φ2.4	17-30	Long	8.5-15
Φ3.0	8-40	Short	4-8
Φ3.0	14-40	Long	6-18
Φ4.0	10-72	Short	4-24
Φ4.0	16-72	Long	8-36
Φ4.5	20-80	Short	7-27
Φ4.5	20-72	Fully	
Φ6.5	30-120	Short	16
Φ6.5	50-120	Long	32
Φ6.5	30-120	Fully	
Φ7.3	30-120	Short	16
Φ7.3	50-120	Long	32
Φ7.3	30-120	Fully	

Full Thread Compression Screws

D	L
Φ2.5	8-26
Φ3.5	16-40
Φ4.0	16-50
Φ5.2	25-80

Thread Washers

D	
Φ5.5	

Standard Washers

D
Φ4.5
Φ6.5
Φ7.0
Φ10
Φ13
Φ16
Φ22


Deflection Washers

D	
Φ13	

Headless Compression Screws

D	L	Thread	
Φ2.4	10-40	Short	4-10
Φ2.4	17-40	Long	6-16
Φ3.0	10-40	Short	4-7
Φ3.0	16-40	Long	7-18
Φ4.0	16-72	Short	5-24
Φ4.0	20-72	Long	10-36
Φ4.5	26-80	Short	6-16
Φ4.5	30-80	Long	12-32
Φ5.5	25-70	Short	8-12
Φ5.5	40-100	Long	16
Φ6.5	30-120	Short	16
Φ6.5	50-120	Long	32

Features:

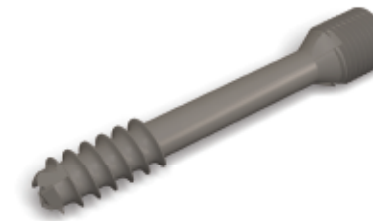

1. Complete ranges of cannulated screw can match various clinical needs.

2. Stardrive recess design prevents screw slippage effectively.

3. Self-tapping screw facilitates procedure process.

4. Different thread length accommodates different fragment compression needs.



5. Headless Compression Screws applies variable thread pitch, achieving fragment compression upon screw insertion.



6. Full Thread Compression Screws create total compression and secure stability.

7. Our products are manufactured using one or more of the following materials: commercially pure titanium(ISO 5832-2, ASTM F67),Ti6Al4V alloy(ISO 5832-3, ASTM F1472).